


4-2058 Windscreen Mount Warning Light - Instructions

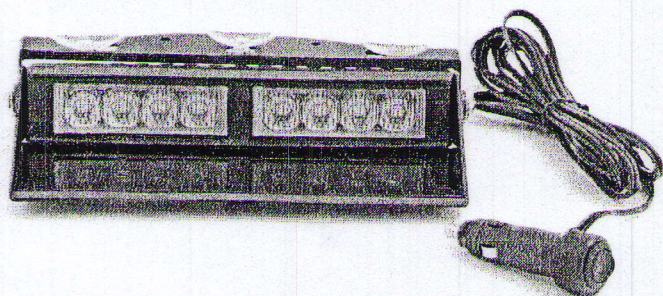

TECHNICAL SPECIFICATIONS	
Overall Dimensions	247mmL x 141mmW 83mmH
Input Voltage Range	10-16Vdc
Light Output (max)	25.6W
Mounting	Suction Mount
Number of Flash Patterns	22
Colour Options	Red, Blue, Amber or White Red-Blue, Blue-White

INSTALLATION INSTRUCTIONS

- This warning light is designed for Interior or Exterior use
- Ensure the light is placed in a well ventilated area away from sources of heat
- Loosen the 2x bracket mounting screws to adjust the position of the light on the bracket
- Tighten these mounting screws when the desired angle is achieved before use
- Make sure suction mount cups are securely applied to windscreen surface before use
- Connect to a 12V power source via the lead and adapter supplied
- Use the on/off switch on the cigarette plug adapter to power the unit on or off
- Use the red button on the rear of the light housing to change flash-pattern to the desired setting



This Light uses High-Intensity LED lights. DO NOT stare directly into the light while it is switched on as momentary blindness and/or permanent eye damage may occur.



Care should be taken when positioning this warning light so that neither the light or cord interferes with the correct operation of the vehicles airbag systems. Refer to the vehicle manufacturer's handbook for information on airbag deployment zones.

Flash Patterns			
1	Single flash	12	Alternating quad flash (fast)
2	Double flash	13	Alternating single flash
3	Triple flash	14	Split module 1/2+1/2 alternating flash
4	Quad flash	15	Alternating split module triple flash
5	Continuous flash	16	Alternating split module double flash
6	Triple flash (fast)	17	Arrow - Right>Left>Right
7	Quad flash (fast)	18	Arrow - Right>Left Fill
8	Alternating single flash	19	Fast flash(3sec)+single flash (7sec)
9	Alternating double flash	20	4x fast quad, 4x fast triple, 8x single
10	Alternating triple flash	21	8x single flash, 8x alternating single
11	Alternating triple flash (fast)	22	4sec fast single+4x alternating single

KEY FEATURES

1. 8x Super Bright Gen3 LEDs (2x4)
2. Long Life LEDs - no maintenance
3. Adjustable Shield
4. Pattern Change Switch
5. Interior or Exterior Use
6. Robust design

