


9-000-HK

Mount Kit for Lightbars

HAZTEC

GLOBAL WARNING

Thank you for purchasing this Haztec product. Before proceeding with installation it is essential to read and understand this instruction booklet.

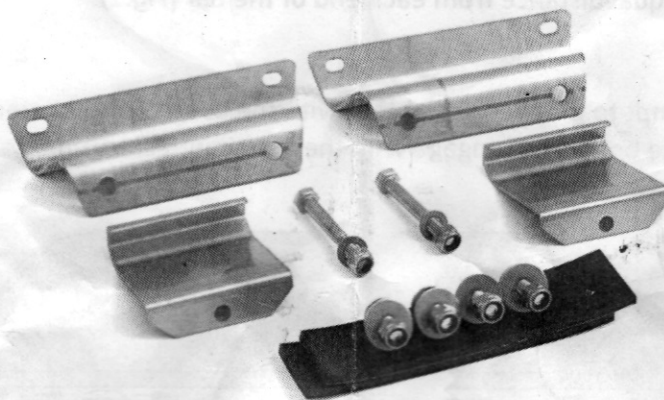

CAUTION!

- This product must only be installed by persons competent in vehicle installations
- It is the installers responsibility to ensure that the mounting surface is adequate for the product being installed
- Only the fixings provided with this kit should be used

Kit Contents:

Qty	Part Number	Description	
2	9-00075-003	'Z' Bracket	
2	9-00097-000	Standard Hook	
2	9-00150-002	Rubber Block	
2	9-00120-006	M8 x 60mm Bolt Hex Head S/S	
2	9-00122-011	M8 X 15mm Washer S/S	
4	9-00120-002	M8 x 20mm Coach Bolt BZP	
4	9-00122-013	M8 x 25mm Washer S/S	
6	9-00121-006	M8 Nyloc Nut S/S	

9-000-HK Mount Kit for Lightbars

HAZTEC


GLOBAL WARNING

Installation Instructions:


- Select a suitable location on the vehicle roof for mounting the Lightbar
- Determine the position of the 'Z' brackets on the Lightbar extrusion ensuring that the brackets are at equal distance from each end of the bar (*Fig.1*)

IMPORTANT!

- **DO NOT** attempt to mount the Lightbar with the coach bolts located in the plastic end pieces, the bolts must engage with the aluminium extrusion

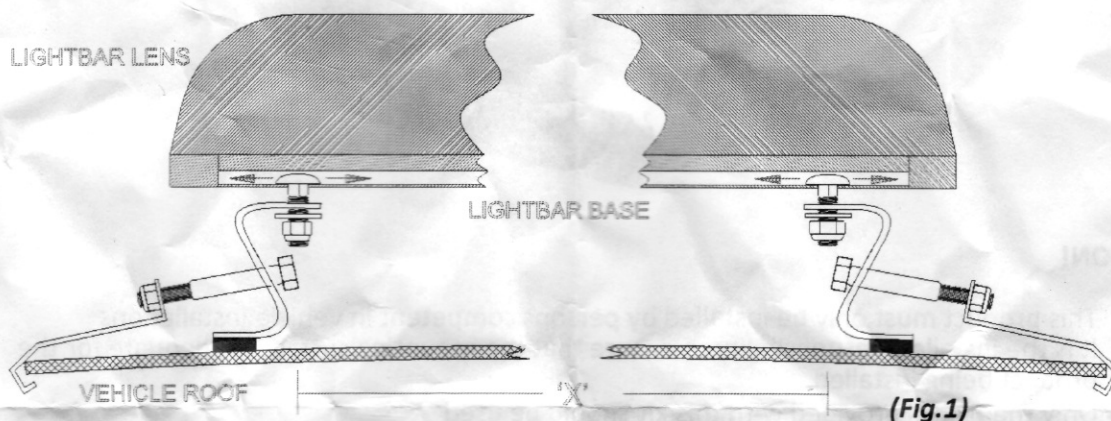

- Place each of the M6 x 20mm coach bolts into the channel of the extrusion and slide along to the required position (*Fig.2*)



- Pass each coach bolt through the 'Z' bracket followed by an M8 washer and nyloc nuts – tighten the nuts to a maximum torque of **6.0Nm**
- Position the Lightbar onto the vehicle using a rubber block underneath the 'Z' brackets to prevent damage to the roof – *it advisable to support the Lightbar until the fixing hooks are secured in place*
- Place an M8 x 60mm bolt through the hole in the centre of each 'Z' bracket
- Attach the standard hook then an M8 x 15mm washer and nyloc nut
- Align the hooks into the vehicle gutter then gradually tighten the nyloc nuts until the Lightbar becomes secure on the vehicle roof