

Before using this product, please read the operation instruction carefully.


Summary

CJB- is specialized motorcycle siren developed by our company in new century, with MANUAL, WAIL1, WAIL2 and public address function, and alarm lamp can be controlled at the same time, the performances of siren tones all meet GB8108-1999 the national standard.

Main technical data


Model		
Specification		
Working Voltage	DC12V	
Power	20W+20W	20W
Impedance	4Ω	8Ω
Siren tones	MANUAL, WAIL1, WAIL2	
Characteristic of sound	Input sensitivity 100mv input impedance 600Ω	
Lamp current	≤5A	

Buttons Name and its Function on the control box

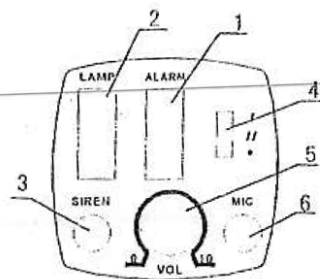

1. Power switch for siren
2. Power switch for warning light
3. MANUAL Switch: press down to make MANUAL tone
4. Siren Switch: / WAIL2, // WAIL1, • OFF
5. Revolving button: adjust the volume of Microphone
6. Microphone socket: use microphone for public address.

Connecting diagram

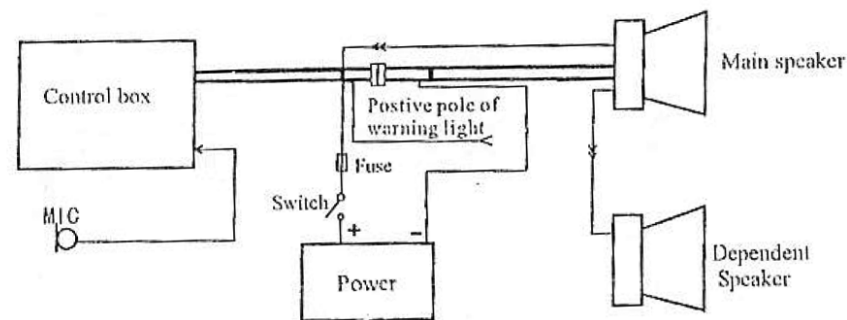

Operation

1. Make sure all wires connected correctly, then open power switch and No.1 switch to connect with power of siren.
2. Press down MANUAL Switch 3 to get MANUAL tone
3. Siren switch 4 controls WAIL1 and WAIL2, / for WAIL2, // for WAIL1 and • for mute
4. Warning light switch 2 controls warning lights. Put it at ▲ to take lights work and Put it at ▼ to stop;
5. When the Public Address is necessary, please put Switch 4 on ● for mute, and insert Microphone in No.6 socket, then turning No.5 switch to get suitable volume.

Notice

1. In case, microphone will be used on sandy or very dirty place, be sure it with spongy cover to avoid entering some small sands or dust on for improving speaking quality, although the volume of speaking will be lower, but it is necessary.
2. Wire connection should be correct; otherwise siren would not work properly.
3. Power voltage should be same with working voltage; otherwise permanent damage will be caused.
4. Before turn on the siren, take care all people around the speaker to avoid scared.