



TECHNICAL SPECIFICATIONS

Item	091401
Voltage	DC 10-33V
Max Power	30W
Frequency	200-1600HZ
Sound Distortion	≤5%
Sound Intensity	≥110dB
Siren Tones	30
Certification	ECE R10

FEATURES

- 10-33V multi-voltage input, multiple speakers work synchronously to improve the sound intensity and a function to decrease the volume at night, meet requirements for sound output;
- An output integration of amplifier, speaker and lighting control, compact design for simple installation and space saving;
- 30 programmable siren tones for versatile needs in different regions and industries.
- Supports external microphones (optional)
- Supports up to 8amp warning light, the external warning light operates synchronously with the siren.
- A separate input control line allows individual on/off control over the warning light.

WIRING

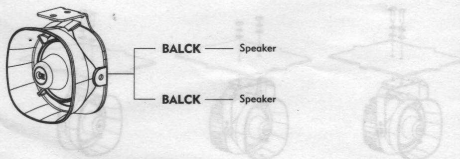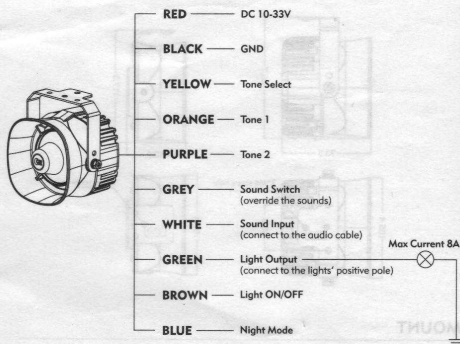


Note: There are no pre-set tones




WARNING

Do not connect GRN/WHI wire to the positive terminal of the battery.

DIMENSIONS

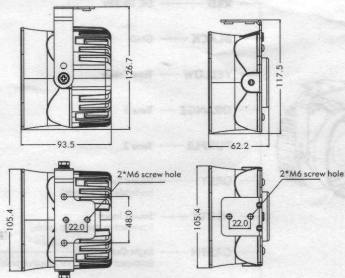

MOUNT

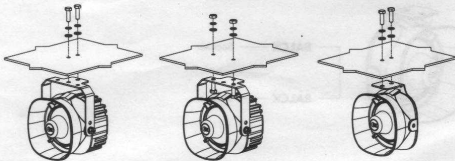

Please wear hearing protection equipment, for loud sound may damage hearing ability.



SIREN TONES

1	Wail
2	Yelp
3	Piercer
4	Airhorn
5	Hi/Low
6	China police
7	China ambulance
8	Francia Police
9	Francia Gendarmerie
10	Francia Sapeur-pompier
11	Francia ambulance
12	Francia private ambulance
13	Italia ambulance
14	Italia Police
15	Fire Brigade (Italy and Czech Republic)
16	Yelp*249
17	POWERCALL
18	UNITROL-ULTRAHILO
19	UNITROL-HERTRO
20	Hi/Low 466p
21	Horn
22	Wail (SUBTONE)
23	Yelp (SUBTONE)
24	Piercer (SUBTONE)
25	Airhorn (SUBTONE)
26	Hi/Low (SUBTONE)
27	POWERCALL (SUBTONE)
28	UNITROL ULTRAHILO (SUBTONE)
29	UNITROL HERTRO (SUBTONE)
30	Manual

TECHNICAL SPECIFICATIONS

Connector

Shell Material	Flame Retardant Material
Material	Copper
Rated Current	32A
Rated Voltage	600V
Applicable Wire	<ul style="list-style-type: none"> • BV single strand hard wire 0.08-4mm² • BVR multi-strand hard wire 0.08-4mm² • RV multi-core cord 0.08-2.5mm²

RJ12 Connector


Shell Material	flame retardant material
Wire Material	28AWG, copper, environmental friendly
Specification Of Extension Wire	250mm/500mm/1000mm

FEATURES


This product is specially designed for quick and easy connection of the siren and microphone.

DIMENSIONS


Connector

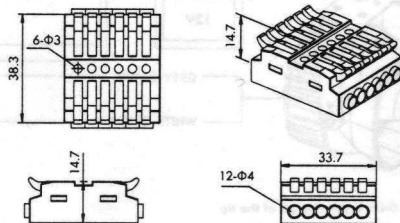

RJ12 Connector

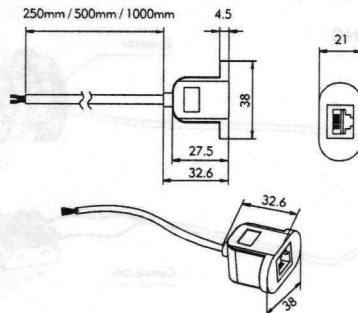

WIRING

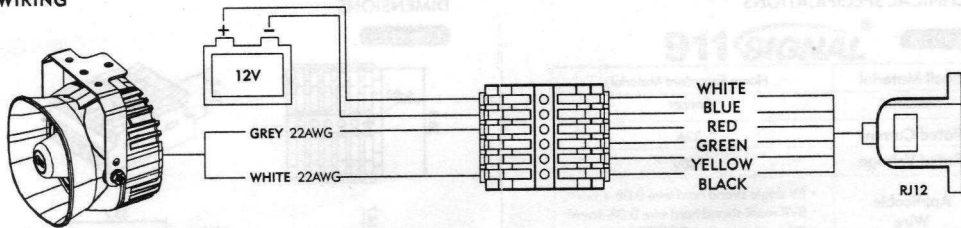

- 1 Strip 10mm insulation off of the tip
- 2 Flip the clip and insert the wire into the corresponding inlet
- 3 Press the clip down till a "click" is felt

MOUNTING

